Iris

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

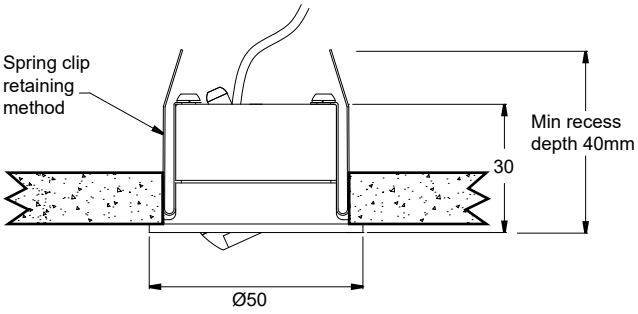

Order Code	Iris.col temp.beam.finish
Example	*Iris.2700K.medium.anodised*

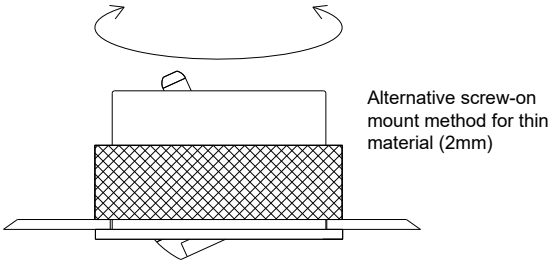

Materials:	Aluminium
Light source:	MSL Star (1 x Osram Oslon Square)
IP Rating:	IP66
Finish:	Anodised aluminium or painted any RAL colour (eyeball will remain anodised)
Dimming:	1-10V, DMX, DALI, Mains or Wireless
Cut out:	Ø44mm
Driver:	Remote driver required Allow 2W at 700mA
Locking:	1.5mm Allen key required
Available tilt:	±22º
Cut out:	Ø44mm
Weight:	0.1kg
Description:	IP66 rated adjustable and lockable eyeball fitting that finishes almost flush with the mount surface
Accessories:	Find photometry data on the product page on our website. Snoots available.

Snoot Options:

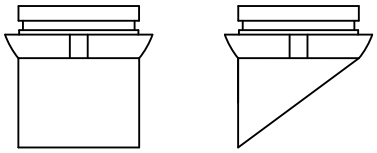

Please note all output figures are based on output from bare LED strips/arrays and for indicative purposes only, output will vary when in fittings and as a function of the LED colour and running temperature

LED Information

Each LED “lamp” consists of one or more Osram Oslon Square power LEDs thermally bonded to an aluminium cored printed circuit board.

MSL Star

Ø21mm PCB with a single Osram Oslon Square LED.
For Ø20mm optics.