




ZTA.50.PLP - Static White

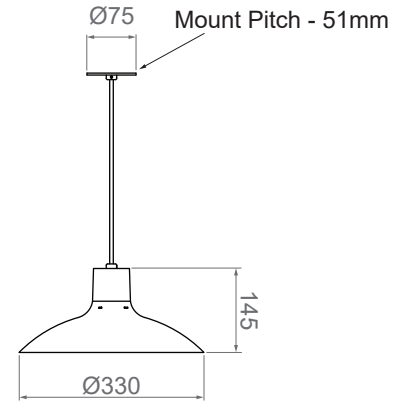

Order Code	ZTA.50.PLP.LED.Mount.Finish
Example	ZTA.50.PLP.XOB_3000K_90CRI.Surface.PW



- Materials:** Aluminium heatsink, Recycled Plastics (PW, AW or P+AW - see *Shade Options*)
- Light source:** Xicato XOB 9.8mm
- Colour temp:** 2700, 3000, 3500 or 4000K
- Output:** Find compatible modules and photometry data on the product page on our website.
- CRI Ra:** ≥90 or ≥95
- Finish:** See *Shade Options*.
- Dimming:** Wireless, 1-10V (*Not available on LV track*), DALI (*DMX & Mains Dim are available on surface mount version only*).
- Beam:** 19.7°, 27°, 35.9°, 50.1°, 'Full'
- Supply:** Mains Track, 48V DC(LV Track), or remote 250mA constant current driver.
- Weight:** 0.9kg
- Description:** The static white version of our Plastic Light Pendant.
The powder used to give a durable protective coating to our aluminium luminaire housings can be 100% recycled. Overspray from the spray booths in Stoane Lighting's paint shop can be collected and, with PMMA monomer binder, formed into moulds for casting into unique Plastic Light Pendants.
- Deviation:** Can be supplied with a range of cable finishes and lengths.

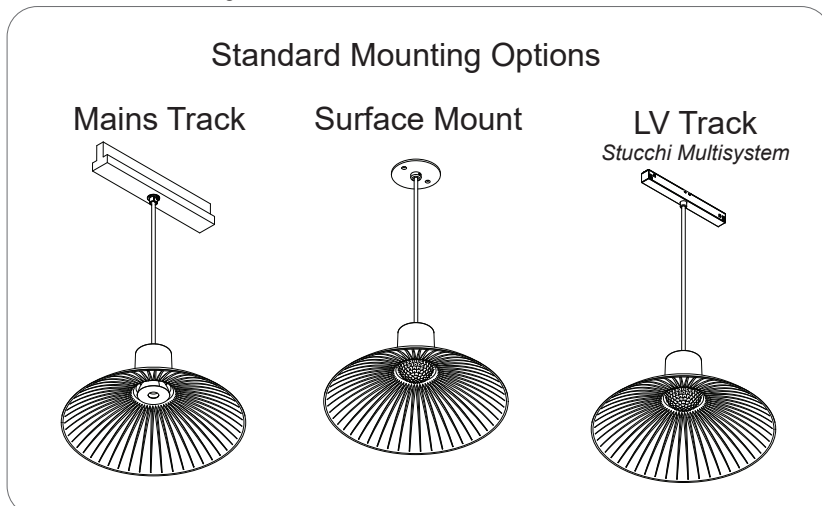



Optic


<p>CRI ≥ 90 1151lm (Initial @ 3000k)</p>	<p>CRI ≥ 95 1020lm (Initial @ 3000K)</p>
<p>Narrow (19.7°) Medium (27°) Flood (35.9°) Wide Flood (50.1°)</p>	

Full

<p>CRI ≥ 90 1151lm (Initial @ 3000k)</p>	<p>CRI ≥ 95 1020lm (Initial @ 3000K)</p>
<p>Full beam</p>	

Cable Options

Standard cables are black but custom options (colours, material) are available.

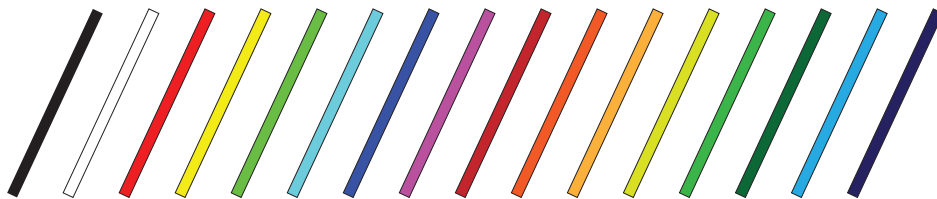

Shade Options

PW - Powder Waste



PW (Powder Waste): 12% captured microplastic powdercoat waste, 88% clear acrylic.

AW - Acrylic Waste



AW (Acrylic Waste): 40% granulated clear acrylic waste, 60% clear acrylic.

P + AW - Powder & Acrylic Waste



P+AW (Powder and Acrylic Waste): 12% captured microplastic powdercoat waste, 45% granulated clear acrylic waste, 43% clear acrylic.