


ZTA.50.PLP - Tunable White



Order Code	ZTA.50.PLP.LED.Mount.Finish
Example	ZTA.50.PLP.CTM_3000K_90CRI.Surface.PW

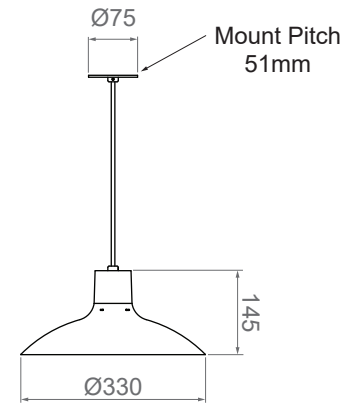


- Materials:** Aluminium heatsink, Recycled Plastics (PW, AW or P+AW - see *Shade Options*)
- Light source:** Tunable White 9mm LED
- Colour temp:** 2700K to 6500K
- Output:** Find compatible modules and photometry data on the product page on our website.
- CRI Ra:** ≥90
- Finish:** See *Shade Options*.
- Dimming:** Casambi, DALI
- Beam:** 19.6°, 26.6°, 35°, 58.4°, 'Full'
- Supply:** Dual Channel constant current remote driver or 48VDC (LV Track).
- Weight:** 0.9kg
- Description:** The tunable white version of our Plasting Light Pendant.


The powder used to give a durable protective coating to our aluminium luminaire housings can be 100% recycled. Overspray from the spray booths in Stoane Lighting's paint shop can be collected and, with PMMA monomer binder, formed into moulds for casting into unique Plastic Light Pendants.
- Deviation:** Can be supplied with a range of cable finishes or lengths.

Standard Mounting Options

Surface Mount




LV Track *Stucchi Multisystem*





Optic



CRI ≥ 90
 740lm (Initial @ 6500k)
 675lm (Initial @ 2700k)

Narrow (19.6°)
 Medium (26.6°)
 Flood (35°)
 Wide Flood (58.4°)

Full




CRI ≥ 90
 740lm (Initial @ 6500k)
 675lm (Initial @ 2700k)

Full beam

Cable Options

Standard cables are black but custom options (colours, material) are available.

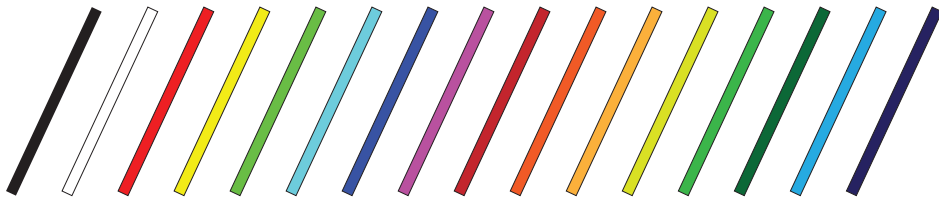

Shade Options

PW - Powder Waste



PW (Powder Waste): 12% captured microplastic powdercoat waste, 88% clear acrylic.

AW - Acrylic Waste



AW (Acrylic Waste): 40% granulated clear acrylic waste, 60% clear acrylic.

P + AW - Powder & Acrylic Waste



P+AW (Powder and Acrylic Waste): 12% captured microplastic powdercoat waste, 45% granulated clear acrylic waste, 43% clear acrylic.