


ZTA.50.PLP - Warm Dim



Order Code	ZTA.50.PLP.LED.Mount.Finish
Example	ZTA.50.PLP.CDM_3-1800K_90CRI.Surface.P+AW

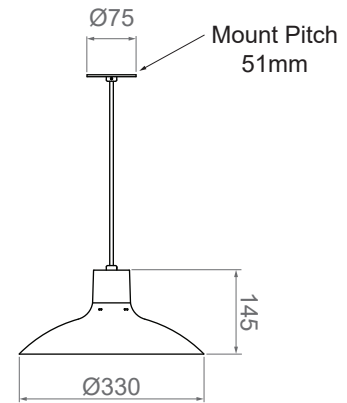


- Materials: Aluminium heatsink, Recycled Plastics (PW, AW or P+AW - see *Shade Options*)
- Light source: Warm Dim 9mm LED
- Colour temp: 3000K to 1800K
- Output: Find compatible modules and photometry data on the product page on our website.
- CRI Ra: ≥95
- Finish: See *Shade Options*.
- Dimming: Wireless, 1-10V (*Not available on LV track*), DALI (DMX & Mains Dim are available on surface mount version only).
- Beam: 19.9°, 26.8°, 36°, 53.1°, 'Full'
- Supply: Mains Track, 48V DC(LV Track), or remote 250mA constant current driver.
- Weight: 0.9kg
- Description: The warm dim version of our Plastic Light Pendant.


The powder used to give a durable protective coating to our aluminium luminaire housings can be 100% recycled. Overspray from the spray booths in Stoane Lighting's paint shop can be collected and, with PMMA monomer binder, formed into moulds for casting into unique Plastic Light Pendants.
- Deviation: Can be supplied with a range of cable finishes and lengths.

Standard Mounting Options


Mains Track



Surface Mount




LV Track
Stucchi Multisystem





Optic



CRI ≥ 95
864lm
(Initial @ 3000K)

Narrow (19.9°)
Medium (26.8°)
Flood (36°)
Wide Flood (53.1°)

Full




CRI ≥ 95
864lm
(Initial @ 3000K)

Full beam


Cable Options

Standard cables are black but custom options (colours, material) are available.

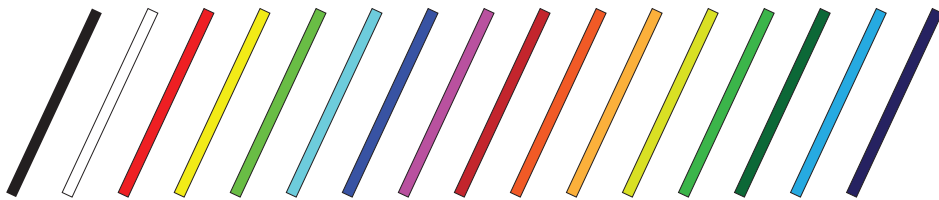

Shade Options

PW - Powder Waste



PW (Powder Waste): 12% captured microplastic powdercoat waste, 88% clear acrylic.

AW - Acrylic Waste



AW (Acrylic Waste): 40% granulated clear acrylic waste, 60% clear acrylic.

P + AW - Powder & Acrylic Waste



P+AW (Powder and Acrylic Waste): 12% captured microplastic powdercoat waste, 45% granulated clear acrylic waste, 43% clear acrylic.