STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

TM65.2 Lighting Calculation

ZTA.50 PLP Zorya


CIBSE TM65.2 Embodied Carbon Mid-level Calculation

Date:	11/10/2023
Assessor/Organisation:	Stoane Lighting
Contact:	sales@mikestoanelighting.com


Embodied Carbon Results with 'Mid-Level TM65 Calculation' Method Total


17.21 kg CO2e

Through Life (25 year) Embodied Carbon (kgCO $_2$ e)



25 year product life



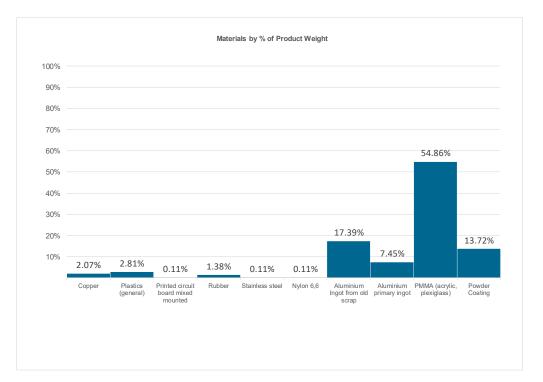

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

TM65.2 Lighting Calculation: Luminaire

ZTA.50 PLP Zorya

CIBSE TM65 Embodied Carbon Mid-level Calculation

Embodied Carbon Results Breakdown (kg CO ₂ e)	
A1: Material Extraction	4.313
A2: Transport	0.373
A3: Manufacturing	5.558
A4: Transport to Site	0.037
B3: Repair	0.163
C2: Transport	0.012
C3: Waste Processing	2.779
C4: Disposal	0.005

Embodied Carbon Results (kg CO ₂ e)	
A1-C4	13.24
A1-C4 with Buffer Factor	17.21

Assumptions	
A1: Material carbon coefficient source	TM65, Table 2.1; TM65.2
	Table 9
C4 Percentage of product going to landfill(%)	55% - TM65 Table 4.14

This report was generated using the CIBSE TM65 Manufacturers form 'beta' version V1.3. Released in August 2023 Stoane Lighting are a UK based company.

Files are generated for a 'standard' version of the fitting and may not include calculations for accessories or derivatives.

Only if LED drivers or Power supplies are integral will they be included in the calculation.

Repair embodied carbon is calcualted based on light source and control gear replacement once in the 25 year product life

For more inoformation please contact us via our website shown below.



This report was produced using the CIBSE documents; TM65 Embodied Carbon of MEP Products - June 2021 TM65.2 Lighting - August 2023

www.stoanelighting.com